



DEVETECH ELECTRONICS, CO. LTD.


Address: 11/F.,F.Block, Hang Lok Building, 130Wing Lok St., Hong Kong.

Address: A3L1, Youpinyishu, Huanmei Rd., Dameisha, Yantian district, Shenzhen, China

Tel: (86) 13632770721 Email: sales@devetechelectronics.com Website: www.devetechelectronics.com

TACT SWITCH

6x6 SIDE PUSH TYPE WITH SUPPORTING TERMINAL AND TAB AVAILABLE

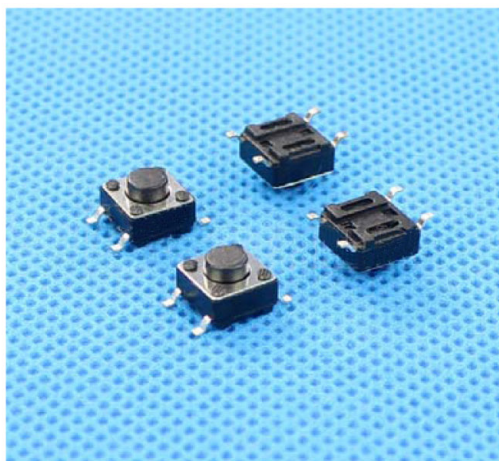

FEATURES

Available with
extendend bracket
Easy to pick and place
Tape and reel=3Kpcs

APPLICATION

Data storage, server
Instrumentation
Audio, OA equipment

SPECIFICATION

Contact rating	50mA 12VDC
Contact resistance	50mΩ max (initial)
Insulation resistance	100mΩ (minDC 250V)
Dielectric strength	AC250V (50/60Hz for 1min.)
Operating force	180/250 (±30gf)
Operating life	80.000 cycles
Environment temperature	-25°C~+105°C

HOW TO ORDER

DVKFC-A06-□□.□A□□□

H (mm):

04,3 13,0
05,0 14,0
06,0 15,0
07,0 16,0
08,0 17,0
09,0 18,0
10,0 19,0
11,0 20,0
12,0 21,0

Operating force (±30gf):

180
250

CIRCUIT

()—INDICATES MOMENTARY POSITION

CIRCUIT CHARACTERISTICS

CONTACT POSITION		CIRCUIT DIAGRAM
OFF	(ON) 1 - 3 2 - 4	

