

# 718 Series





**Operating Temperature**  
 -25□ to +85□ (consider de-rating)

**Storage Conditions**  
 +10□ to +60□  
 Relative humidity: ≤75% yearly average without dew, maximum 30 days at 95%

**Vibration Resistance**  
 24 cycles at 15 min. each (60068-6)  
 10-60Hz at 0.75mm amplitude  
 60-2000Hz at 10g acceleration

Dimensions (units in mm)

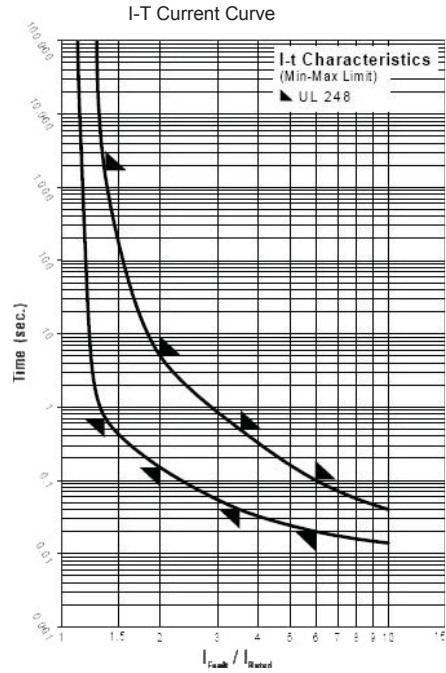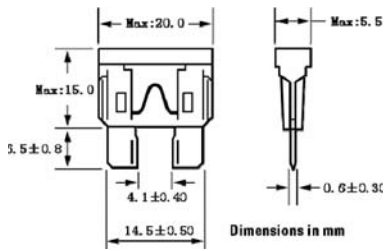

Time vs Current Characteristics:				
Rated Current	110%	135%	200%	350%
1A~2A	>100h	0.5~1800s	0.1~5s	21~500ms
3~40A	>100h	0.75~1800s	0.15~5s	80~500ms



Electrical Characteristics						
Amp Code	Rated Current	Voltage Rating	Body Color Code	Resistance (Ω)	Nominal Melting I2T(A2sec)	Approvals
						cURus 32V
1100	1.00A	32V	Black	0.123	0.4	•
1200	2.00A	32V	Grey	0.050	1.4	•
1300	3.00A	32V	Violet	0.031	7.4	•
1400	4.00A	32V	Pink	0.023	14	•
1500	5.00A	32V	Tan	0.018	26	•
1750	7.50A	32V	Brown	0.011	60	•
2100	10.00A	32V	Red	0.0077	115	•
2150	15.00A	32V	Blue	0.0048	340	•
2200	20.00A	32V	Yellow	0.0033	520	•
2250	25.00A	32V	Natural	0.0025	1080	•
2300	30.00A	32V	Green	0.0019	1510	•
2350	35.00A	32V	Blue Green	0.0016	2280	•
2400	40.00A	32V	Orange	0.0014	3310	•

**Notes:** 1. The breaking capacity for 32V DC is 1000A.  
 2. Permissible continuous operating current is ≤100% at ambient temperature of 23°C (73.4°F)

### Ordering Information

Series	Amp code	Packaging Code	Qty
718			

