



DEVETECH ELECTRONICS CO. LTD

BUZZER
CUSTOMER: DACHS ELECTRONICA
P/N: DVZ09605D05YA

DESIGNED BY	
CHECKED BY	
APPROVED BY	

Address: 11/F.,F.Block, Hang Lok Building, 130Wing Lok St., Hong Kong.

Address: A3L1, Youpinyishu, Huanmei Rd., Dameisha, Yantian district, Shenzhen, China Tel:(86)3632770721

Email: sales@devetechelectronics.com

Website: www.devetechelectronics.com



CONTENTS		
N°	Contents	Page
1	Scope	3
2	Specification	3
3	Appearance drawing	4
4	Acoustic characteristics	4
5	Reliability	5

1. Scope



This specification applies electromagnetic buzzer, DVZ09605D05YA.

2. Specification

	Items	Unit	Specification	Condition
1	Operating voltage range	VDC	4.0 ~ 6.0	Response time 0.5 Sec.
2	Rated Voltage	VDC	5.0	Volts DC
3	Sound Pressure level	dB	Min. 80	at 10cm at Rated Voltage
4	Rated current	mA	Max 30mA	
5	Frequency of output signal	HZ	2700± 400	Square wave
6	Operating Temp	°C	-30~70	
7	Storage Temp.	°C	-40~+80	
8	Dimension	mm	Φ9.6*H5	See appearance drawing
9	Weight	g	1.0	
10	Environmental Protection Regulation		RoHS	


3. Appearance drawing

Model No: DVZ09605D05YA

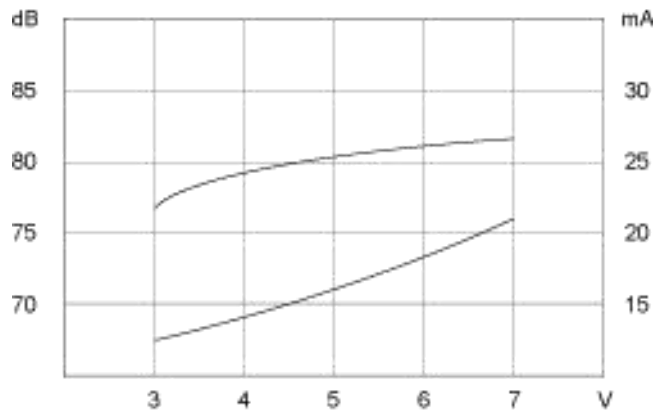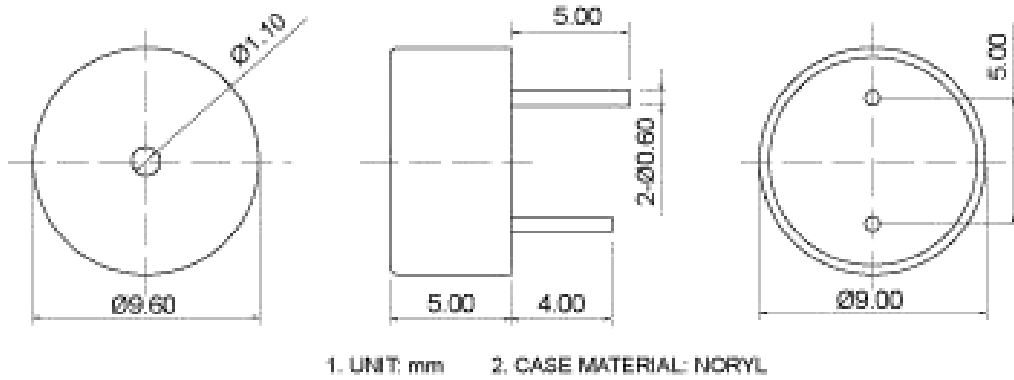



4. Acoustic Characteristics

The oscillation frequency, current consumption and sound pressure are measured by the measuring instruments shown below

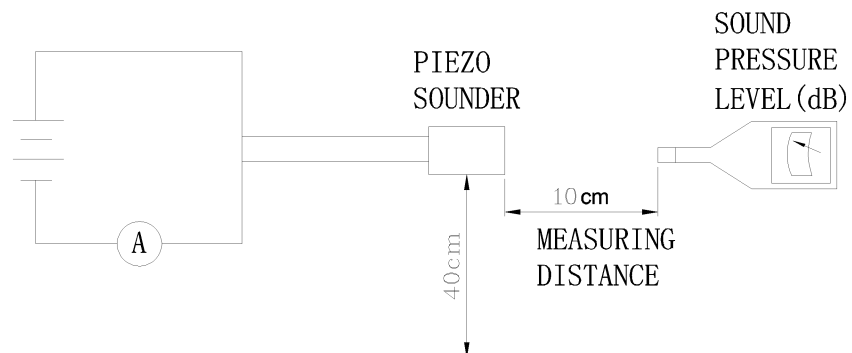

In the measuring test, buzzer is placed as follows:

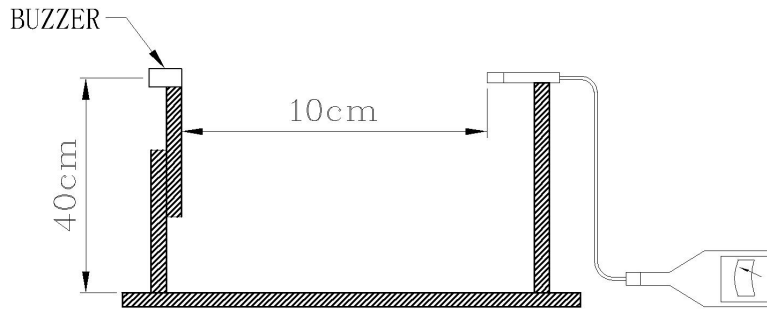

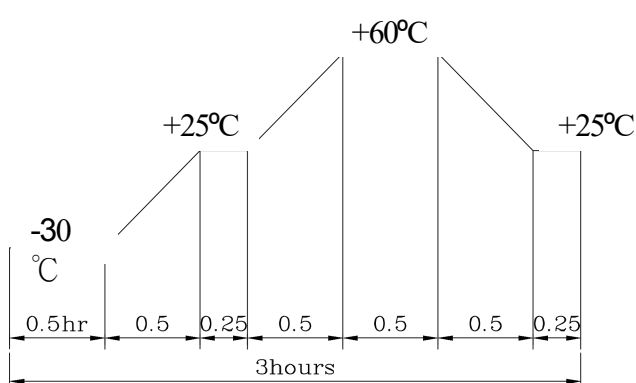NO.	ITEM	TEST CONDITION AND REQUIREMENT
1	High Temperature Test (Storage)	After being placed in a chamber with $70\pm 2^{\circ}\text{C}$ for 48 hours and then being placed in normal condition for 2 hours. Allowable variation of SPL after test: $\pm 10\text{dB}$.
2	Low Temperature Test (Storage)	After being Placed in a chamber with $-20\pm 2^{\circ}\text{C}$ for 48 hours and then being placed in normal condition for 2 hours. Allowable variation of SPL after test: $\pm 10\text{dB}$.
3	Humidity Test	After being Placed in a chamber with 90-95% R.H. at $40\pm 2^{\circ}\text{C}$ for 48 hours and then being placed in normal condition for 2 hours. Allowable variation of SPL after test: $\pm 10\text{dB}$.
4	Temperature Cycle Test	<p>The part shall be subjected to 5 cycles. One cycle shall be consist of :</p>  <p>Allowable variation of SPL after test: $\pm 10\text{dB}$.</p>
5	Vibration Test	After being applied vibration of amplitude of 1.5mm with 10 to 55 Hz band of vibration frequency to each of 3 perpendicular directions for 1 hours. Allowable variation of SPL after test: $\pm 10\text{dB}$.
6	Solderability Test	Lead terminals are immersed in rosin for 3 seconds and then immersed in solder bath of $+260^{\circ}\text{C}$ for 3 seconds. 90% min. lead terminals shall be wet with solder (Except the edge of terminals).
7	Terminal Strength Pulling Test	The force of 5N is applied to each terminal in axial direction for 5 seconds. No visible damage and cutting off.



TEST CONDITION

Standard Test Condition: a) Temperature: +5 ~ +35°C b) Humidity: 45-85%
c) Pressure : 860-1060mbar

Judgment Test Condition: a) Temperature: +25 ± 2°C b) Humidity : 60-70%
c) Pressure 860-1060mbar



DEVETECH ELECTRONICS CO. LTD

NOTES
