



CUSTOMER COPY

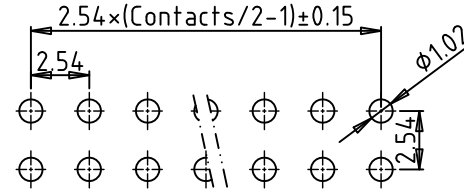

REVISION DATA



SYM	ECN	DESCRIPTION	DATE	APPROVED

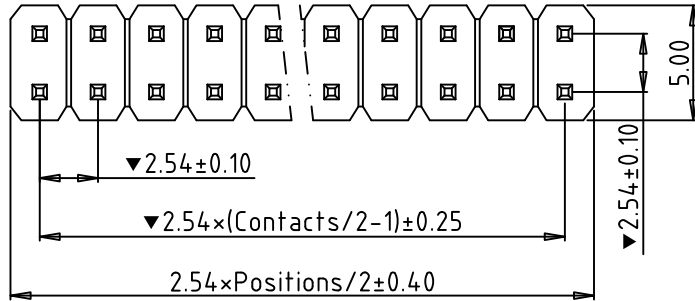

Recommended P.C.B Layout(±0.05)

Technical Data

Contact: brass JIS C2700(H65)  
 Contact plating: see ordering information  
 Insulator: black glass filled polyester UL94V-0  
 Current rating: 3Amps  
 Contact resistance: 20mΩ max.  
 Insulation resistance: 1000MΩ min. at 100V  
 Withstanding Voltage: 550V AC/minute  
 Retention force: 1Kgf/contact min.  
 Operating temperature: -55°C to+105°C  
 Soldering temperature: 245°C±5° 5S  
 Critical Dimensions: ▼

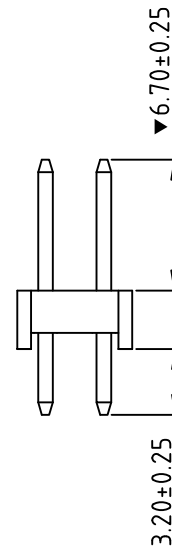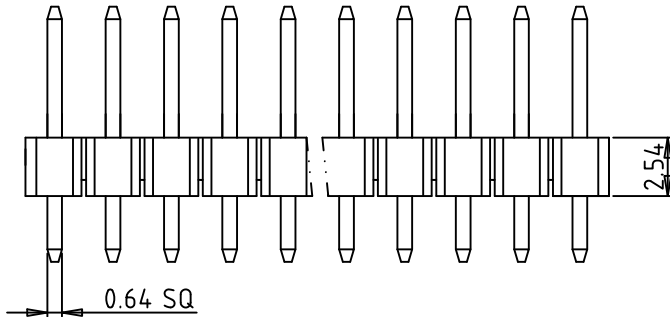

Ordering information

QHA2	25	1 - P	XX	X	X	A	253
High Option 25: H=2.54mm		No. of Positions 02-80	Plating Option A G/F B Au3μ" C Au5μ" D Au10μ" H GF/Sn120μ" S Sn120μ" Z Special (Underline option is standard)	Insulator Material Option A BK-PBT F BK-LCP G BK-PA9T S Special (Underline option is standard)	Type Option A Normal C With CAP	Series No. 01-999	

**natconn**® 广东纳特康电子股份有限公司  
 GUANGDONG NATCONN ELECTRONIC CO.,LTD

Packing		TOLERANCE:	PROJECTION	TITLE:		
1.General	√	ANGLE ±2°		Pitch2.54*H2.54mm Pin Header Dual Row Straight Type		
2.Tape&Reel		X.XXX ±0.01	DATE	2013/07/22	CUSTOMER:	N/A
3.Tube		X.XX ±0.25	DRAWN	于松	CUSTOMER P/N:	N/A
4.Tray		X.X ±0.35	CHECKED	唐建平	PART NO.:	QHA2251PA253
5.Other		X. ±0.50	APPROVED	冯显东	DRAWING NO.:	QHA2251PA253
			SIZE:	A4	UNIT:	mm
			SCALE:	1:1	SHEET:	1/1